

BALUN TRANSFORMER




- ◆ Excellent EMI performance
- ◆ Suitable for reflow soldering
- ◆ Current-compensated double choke
- ◆ High rated currents, reduced components height
- ◆ Comply with ROHS

ELECTRICAL SPECIFICATIONS@25°C (Operating Temperature :-40°C to +105°C)

Part Number	Impedance	Insertion Loss	Amplitude Balance	Phase Balance	Input return loss
	6-4:1-3	5-250MHz	1-250MHz	1-250MHz	1 - 250 MHz
TM10023ST	4:3	1.0 dB Max	±0.7dB Max	0.5±10dB Max	18dB Min

MECHANICAL(Unit:mm)

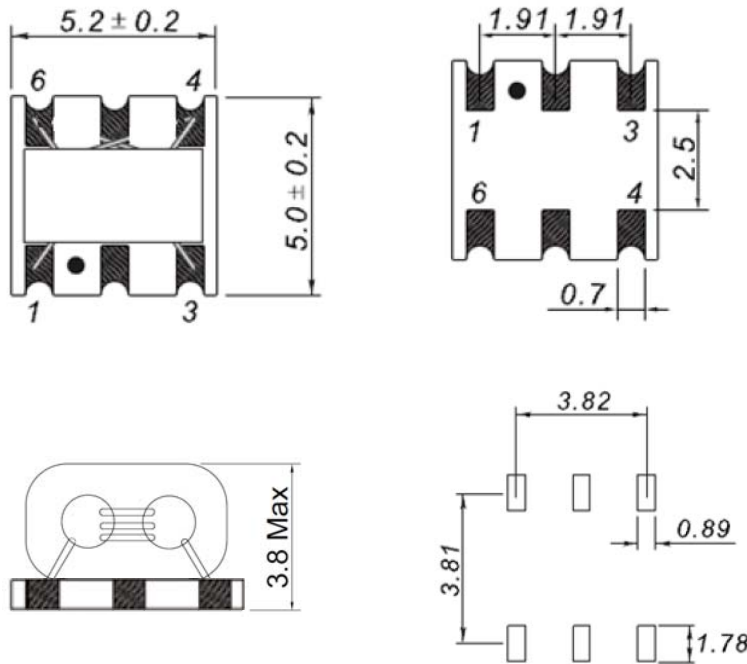

SUGGESTED PAD LAYOUT

SCHEMATICS

