

BALUN TRANSFORMER




- ◆ Excellent EMI performance
- ◆ Suitable for reflow soldering
- ◆ Current-compensated double choke
- ◆ High rated currents, reduced components height
- ◆ Comply with ROHS

ELECTRICAL SPECIFICATIONS@25°C (Operating Temperature :-40°C to +85°C)

Part Number	Turns Ratio @20KHz,1V	OCL @ 100 KHz, 0.1V			DCR		
		1-3	2-4	8-5	1-3	2-4	8-5
TM11015ST	2:1:2±2%	50uH±60%	10uH±60%	50uH±60%	200mΩ MAX	100mΩ MAX	200mΩ MAX

MECHANICAL(Unit:mm)

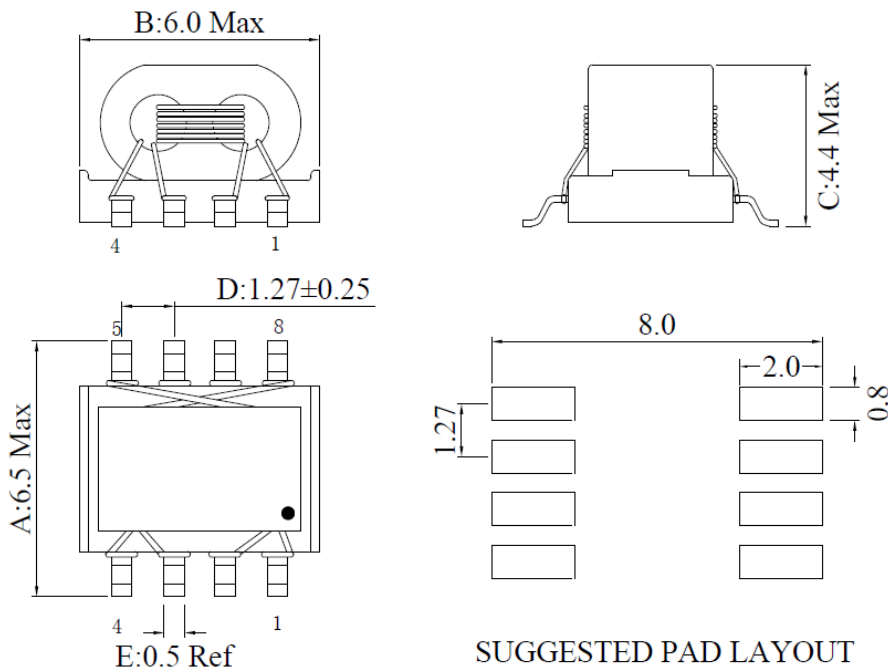

SCHEMATICS

