


- ◆ RoHS Compliant
- ◆ Operating temperature: -40°C to +125°C
- ◆ Storage temperature: -40°C to +125°C



Electrical Specification @25°C			
PART No.	Ls@10KHz,1.0V	LK@10KHz,1.0V	Turns Ratio@20KHz,1.0V
PW01341ST	1-2	1-2(short other pin)	(1-2):(4-3):(5-7):(6-8)
	160uH±8%	4.8uH Max	1:0.475:0.4:0.4±3%

Continue				
DCR@25°C				Hi-pot
1-2	4-3	5-7	6-8	PRI,Aux to Sec
290mΩ Max	1320mΩ Max	90mΩ Max	150mΩ Max	2000VAC/5mA/60S

MECHANICAL(Unit:mm)

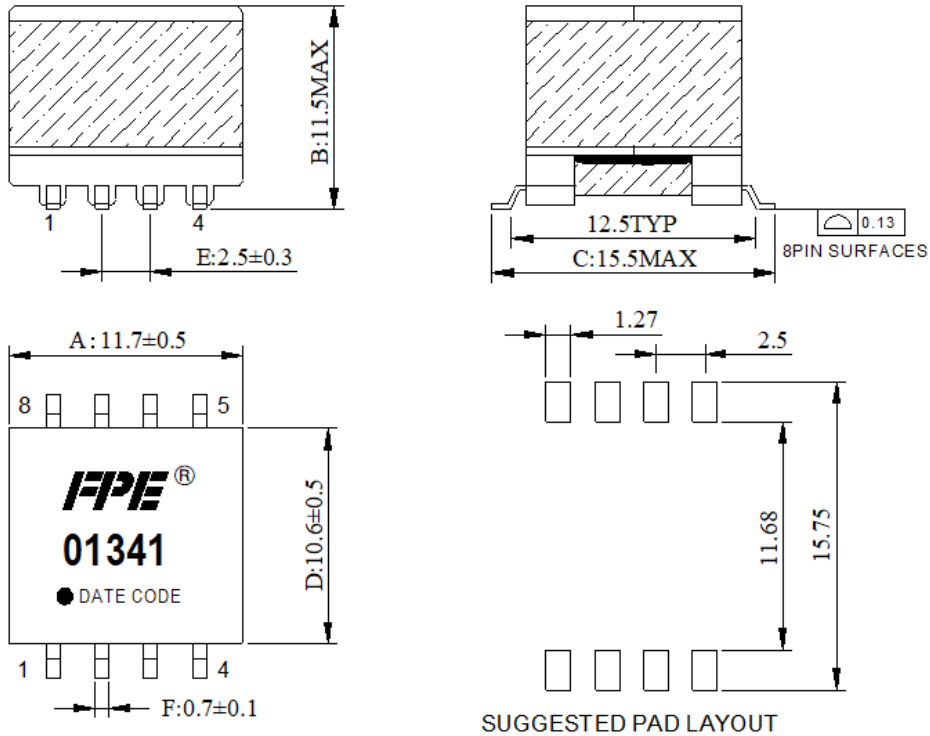

SCHEMATICS

