


- ◆ RoHS Compliant
- ◆ Operating temperature: -40°C to +125°C
- ◆ Storage temperature: -40°C to +125°C



Electrical Specification @25°C			
PART No.	Ls@100KHz,0.1V	LK@100KHz,0.1V	Turns Ratio@20 KHz, 1V
PW07054ST	1,2-3,4	1,2-3,4 (Short other pins)	(1-3):(2-4):(5-6):(12,11,10-9,8,7)
	20.5uH±10%	1.0uH MAX	1:1:0.438:0.375±2%

Continue			
DCR@25°C			Hi-pot
1,2-3,4	5-6	7,8,9-10,11,12	PRI,AUX to SEC
39mΩ Max	230mΩ Max	8.5mΩ Max	1800VAC/5mA /60Sec

MECHANICAL(Unit:mm)

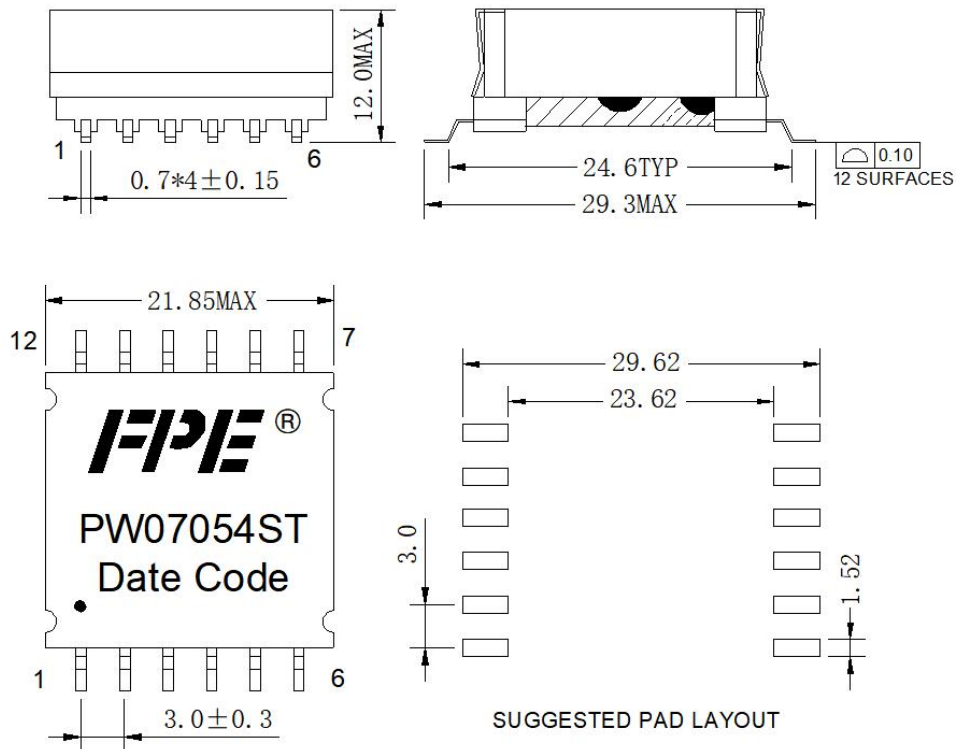

SCHEMATICS

