


- ◆ RoHS Compliant
- ◆ Operating temperature: -40°C to +85°C
- ◆ Storage temperature: -40°C to +85°C



Electrical Specification @25°C						
PART No.	Turns Ratio	OCL@100KHZ, 0.1V	DCR		Hi-Pot	Insertion Loss
RT011011DN	(1-3):(4-6)	1-3=4-6	1-3	4-6	Pri to Sec	2-68 MHz
	1:1	18.0uH±30%	150mΩ MAX	160 mΩMAX	3000VAC/5mA/60S	3.0 dB MAX

## MECHANICAL(Unit:mm)

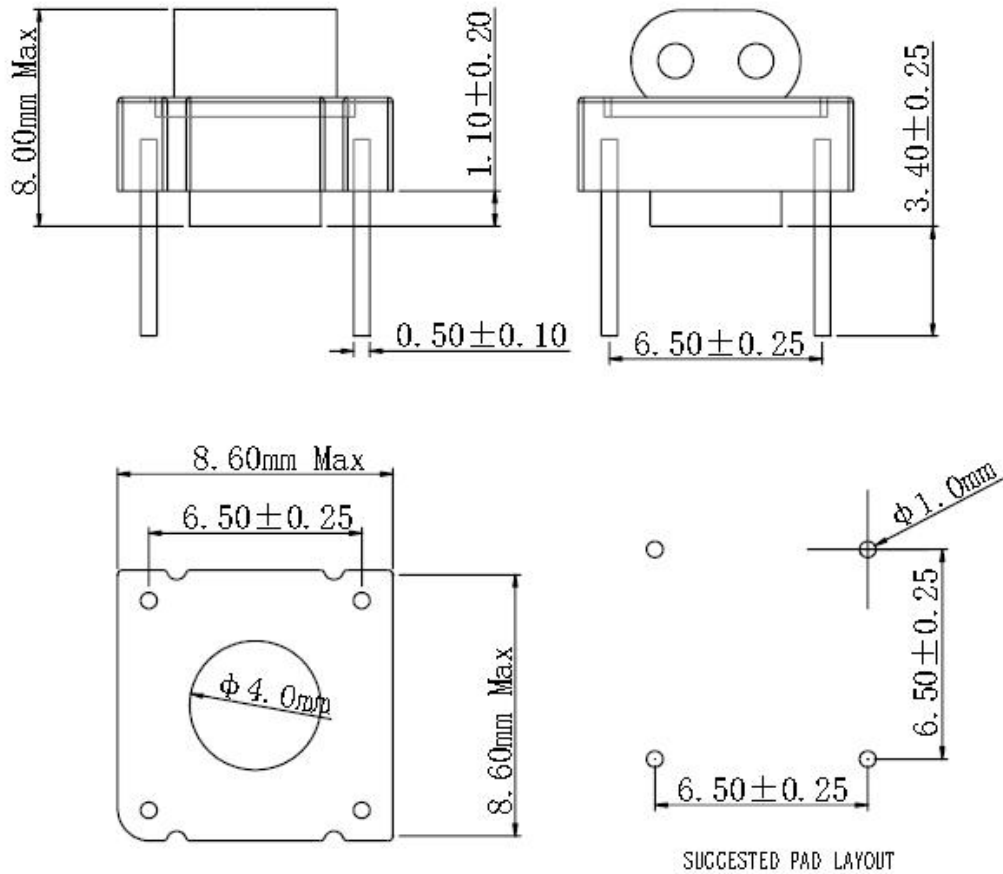

## SCHEMATICS

