




- ◆ RoHS Compliant
- ◆ Frequency 2-68MHz
- ◆ Operating temperature: -40°C to +85°C
- ◆ Storage temperature: -40°C to +85°C

Electrical Specification @25°C					
PART No.	Turns Ratio		OCL@100KHz,0.1V		
RT035013DN	4-1:8-5	4-1:7-6	4-1	8-5	7-6
	3:4±5%	3:1±5%	18.3uH±45%	32.5uH±45%	2.0uH±45%

Continue					
DCR@25°C			Hi-pot	Insertion Loss	
4-1	8-5	7-6	Pri-Sec	4-1:8-5	4-1:7-6
60mΩMAX	120mΩMAX	65mΩMAX	3000VAC/5mA/60S	2.0 dB Max	6.0 dB Max

### MECHANICAL(Unit:mm)

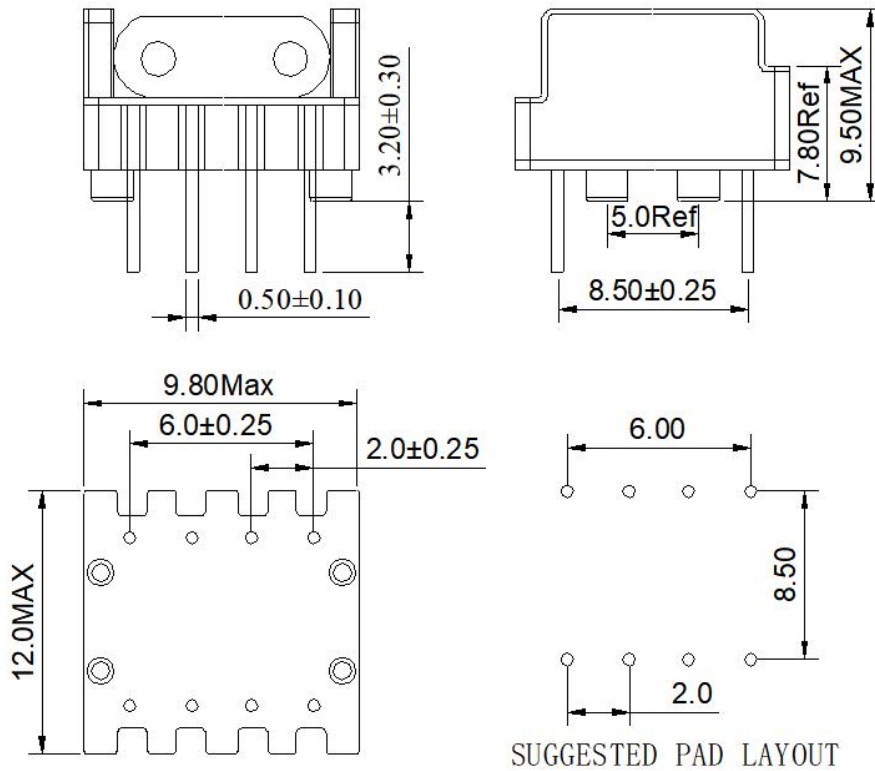

### SCHEMATICS

