

Common Mode Filter


- ◆ Differential Mode Filter
- ◆ Designed For LAN Applications, Surface Mount Type.
- ◆ 720mA Current Capability
- ◆ Comply With ROHS



ELECTRICAL SPECIFICATIONS@25°C (Operating temperature range: -40°C to +85°C)

Part Number	Inductance(uH) 100KHz/0.1v Min@ 30mA DC Bias	DC Resistance (Ω) Max.	Rated Current (mA)	Rated Volt (Vdc)	Withstand Volt. (Vdc)	IR (Ω) Min.
GP4532F-600L	60	1.1	720	50	1500	10M

MECHANICAL

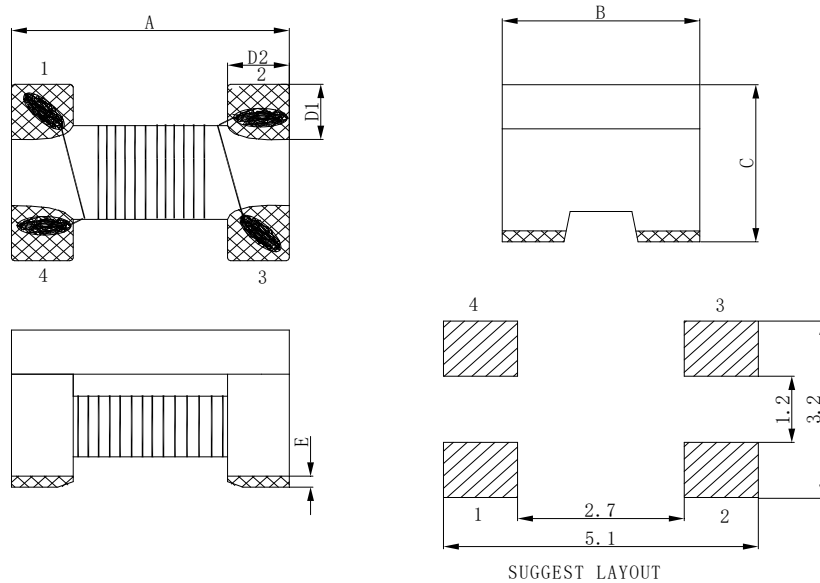

Part Number	A(mm)	B(mm)	C(mm)	D1(mm)	D2(mm)	E(mm)
GP4532F-600L	4.5±0.20	3.2±0.20	3.2Max	1.0±0.20	1.0±0.20	0.35 Max

SCHEMATICS

